


Cartridge Discharger


KE-E310

KE-S610

KE-S953

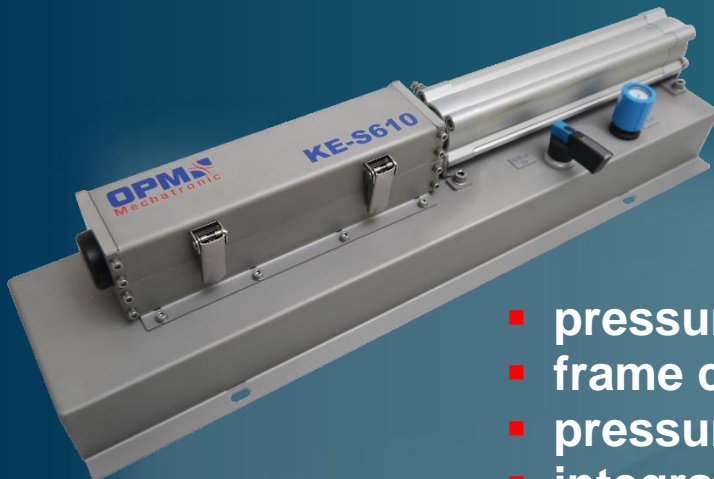

- pressure infinitely adjustable
- frame consists of stainless steel
- pressure regulator
- integrated empty message
- easy hand control
- optional cartridge heater

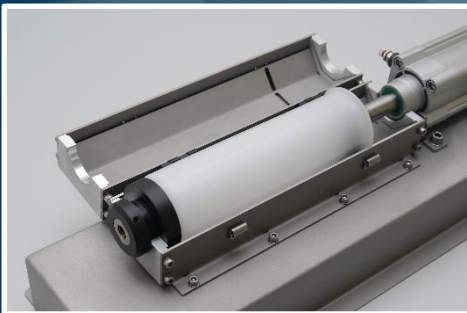

The robust casing consists of stainless steel and is a guarantee for a long-time usage.

The cartridge connector is changeable and different types of connectors are available for a wide range of different cartridges. The frame can be opened by a great hatch and enables a perfect exchange of the cartridges.





The cylinder can be easily extended by the ergonomic designed hand control. In the operating position the plunger is permanent applied by the adjusted pressure.

The working pressure can be comfortably adjusted by the pressure regulator.

The filling level of the cartridge is automatic controlled by using the proximity switch. This can be used as an enable signal for the dispense process.



technical specifications:

housing:	stainless steel / 1.4301
plunger working pressure:	0-58 psi adjustable
supply of compressed air:	max. 145 psi
max. force at 58 psi:	175 lbs
pneumatic components:	Festo
alert of emptiness:	supplying power: 24V/DC, output: 24V/DC

KE-E310 (310ml Euro-Cartridge):

dimensions (l, w, h):	31,4 inch x 7,8 inch x 6,3 inch
weight:	35,5 lbs

KE-S610 (610ml Semco- Cartridge):

dimensions (l, w, h):	31,4 inch x 7,8 inch x 6,3 inch
weight:	35,5 lbs

KE-S953 (953ml Semco- Cartridge):

dimensions (l, w, h):	39,7 inch x 7,8 inch x 6,3 inch
weight:	44 lbs

OPM Mechatronic GmbH

Hansestr. 5

D – 48477 Hörstel-Riesenbeck

Tel.: +49 (0)5454 / 90 58 98-0

Fax: +49 (0)5454 / 90 58 98-5

info@opm-mechatronic.de

www.opm-mechatronic.de